

M820R TROMMEL

http://www.mds-int.net



MDS-INT

Drummond Carrickmacross Co. Monaghan, IRELAND

TEL: +353 42 966 7899 EMAIL: info@mds-int.net WEB: www.mds-int.net The M820R is a heavy duty recycling trommel ideal for concrete and demolition waste. Its heavy duty screens are 15 mm (0.6") thick steel. Apertures can range from 10 to 250 mm (0.4" to 10"). With 2 and 3 split options, this is the perfect trommel for heavy waste separation.



VARIOUS SCREEN OPENINGS




2 OFF 15 kW (20 HP) MOTORS



TECHNICAL SPECIFICATIONS

DIMENSIONS



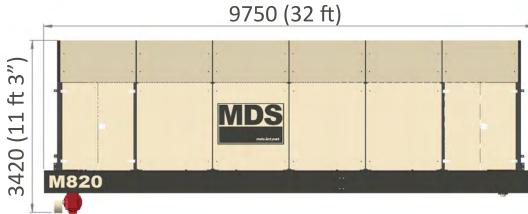

MACHINE SPECIFICATIONS		Weight:	20 tons		
Approx Tons per Hour :	50	Number of Outputs :	2 or 3 off		
Drum Diameter :	2 m (6 ft 7")	Screen Openings :	10 to 250 mm (0.4" to 10")		
Drum Length :	8 m (26 ft 3")	Drive System:	2 off 15 kW (20 HP) Motors		

MDS TROMMEL RANGE

MODEL	Tons per Hour	Drum Diameter	Drum Length	Number of Outputs	Screen Openings	Hopper Capacity	Feed Mechanism	Engine and Controls
MDS M515 TROMMEL		Mobile track	machine for	use with pri	mary blast, d	irty material	or rip rap	
	350 to 500 tons	1.5 m	5 m	250 (0.5'	16 mm to	50 mm 0.5" to	Hydraulic Push	Cat 4.4 / Electronic
		(4 ft 11")	(16 ft 5")		(0.5" to 10")		Feeder	Control System
MDS M615 STATIC TROM				ich can be r	noved from s	site to site a	nd can be lo	aded by an
	350 to 500 tons	excavator or	dump truck					
		1.5 m	6 m	4 off	16 mm to	30 tons	Hydraulic	Cat 4.4 /
		(4 ft 11")	(19 ft 8")		500 mm (0.5" to		Push Feeder	Electronic Control
					20")			System
MDS M820 TROMMEL								
INDS MOZO TROMMEL		A large hear blasted mate		ic rock tron	nmel ideal fo	or cleaning	dirty rock oi	r screening
	750 tons	2 m	8 m	3 or 4 off	16 mm to 500 mm	70 tons	Hydraulic Push	CAT 6.6 / Electronic
		(6 ft 7")	(26 ft 3")		(0.5" to		Feeder	Control
					20")			System
MDS M825 TROMMEL						ximum outp	ut. It can be	set up on
MDS M825 TROMMEL		A super size concrete wa				ximum outp	ut. It can be	set up on
MDS M825 TROMMEL					70 mm to	ximum outp	Hydraulic	Cat 6.6 /
MDS M825 TROMMEL		concrete wa	lls or a meta	l chutes stru	70 mm to 500 mm (3" to			Cat 6.6 / Electronic Control
MDS M825 TROMMEL		2.5 m	lls or a meta	l chutes stru	70 mm to 500 mm		Hydraulic Push	Cat 6.6 / Electronic
MDS M825 TROMMEL MDS M520R TROMMEL	1000 tons	2.5 m	8 m (26 ft 3")	Chutes stru	70 mm to 500 mm (3" to 20")	100 tons	Hydraulic Push	Cat 6.6 / Electronic Control
	1000 tons	2.5 m (8 ft 2")	8 m (26 ft 3")	Chutes stru	70 mm to 500 mm (3" to 20")	100 tons	Hydraulic Push	Cat 6.6 / Electronic Control
	1000 tons	2.5 m (8 ft 2")	8 m (26 ft 3")	Chutes stru	70 mm to 500 mm (3" to 20")	100 tons	Hydraulic Push	Cat 6.6 / Electronic Control
	1000 tons	2.5 m (8 ft 2") A static trom	8 m (26 ft 3") mel ideal for	3 off	70 mm to 500 mm (3" to 20") light recyclings	100 tons	Hydraulic Push Feeder	Cat 6.6 / Electronic Control System
	1000 tons	2.5 m (8 ft 2") A static trom	8 m (26 ft 3")	3 off	70 mm to 500 mm (3" to 20") light recycling	100 tons	Hydraulic Push Feeder	Cat 6.6 / Electronic Control System
	1000 tons	2.5 m (8 ft 2") A static trom 2 m (6 ft 7")	8 m (26 ft 3") mel ideal for 5 m (16 ft 5")	3 off compost or 2 off	70 mm to 500 mm (3" to 20") light recyclin 5 mm to 50 mm (0.2" to 2")	100 tons	Hydraulic Push Feeder	Cat 6.6 / Electronic Control System 2 off 3 kW Motors (4 HP)
MDS M520R TROMMEL	1000 tons	2.5 m (8 ft 2") A static trom 2 m (6 ft 7")	8 m (26 ft 3") mel ideal for 5 m (16 ft 5")	3 off compost or 2 off	70 mm to 500 mm (3" to 20") light recyclin 5 mm to 50 mm (0.2" to 2")	100 tons	Hydraulic Push Feeder	Cat 6.6 / Electronic Control System 2 off 3 kW Motors (4 HP)
MDS M520R TROMMEL MDS M820R TROMMEL	1000 tons	2.5 m (8 ft 2") A static trom 2 m (6 ft 7") A tough state recycling	8 m (26 ft 3") mel ideal for 5 m (16 ft 5")	3 off compost or 2 off	70 mm to 500 mm (3" to 20") light recyclin 5 mm to 50 mm (0.2" to 2")	100 tons The second se	Hydraulic Push Feeder X	Cat 6.6 / Electronic Control System 2 off 3 kW Motors (4 HP) heavy duty
MDS M520R TROMMEL MDS M820R TROMMEL	1000 tons	2.5 m (8 ft 2") A static trom 2 m (6 ft 7") A tough state recycling	8 m (26 ft 3") mel ideal for 5 m (16 ft 5") ic machine l	3 off compost or 2 off	70 mm to 500 mm (3" to 20") light recyclin 5 mm to 50 mm (0.2" to 2") cling concre	100 tons	Hydraulic Push Feeder	Cat 6.6 / Electronic Control System 2 off 3 kW Motors (4 HP) heavy duty 2 off 15 kW
MDS M520R TROMMEL	1000 tons	2.5 m (8 ft 2") A static trom 2 m (6 ft 7") A tough state recycling	8 m (26 ft 3") mel ideal for 5 m (16 ft 5")	3 off compost or 2 off	70 mm to 500 mm (3" to 20") light recyclin 5 mm to 50 mm (0.2" to 2") cling concre	100 tons The second se	Hydraulic Push Feeder X	Cat 6.6 / Electronic Control System 2 off 3 kW Motors (4 HP) heavy duty
MDS M520R TROMMEL MDS M820R TROMMEL	1000 tons 15 tons	2.5 m (8 ft 2") A static trom 2 m (6 ft 7") A tough state recycling 2 m (6 ft 7")	8 m (26 ft 3") mel ideal for 5 m (16 ft 5") ic machine l 8 m (26 ft 3")	3 off compost or 2 off ouilt for recy	70 mm to 500 mm (3" to 20") light recyclin 5 mm to 50 mm (0.2" to 2") cling concre 10 mm to 250 mm (0.4" to	100 tons The second se	Hydraulic Push Feeder X	Cat 6.6 / Electronic Control System 2 off 3 kW Motors (4 HP) heavy duty 2 off 15 kW Motors
MDS M520R TROMMEL MDS M820R TROMMEL	1000 tons 15 tons	2.5 m (8 ft 2") A static trom 2 m (6 ft 7") A tough state recycling	8 m (26 ft 3") mel ideal for 5 m (16 ft 5") ic machine l 8 m (26 ft 3")	3 off compost or 2 off ouilt for recy	70 mm to 500 mm (3" to 20") light recyclin 5 mm to 50 mm (0.2" to 2") cling concre 10 mm to 250 mm (0.4" to	100 tons The second se	Hydraulic Push Feeder X	Cat 6.6 / Electronic Control System 2 off 3 kW Motors (4 HP) heavy duty 2 off 15 kW Motors

QUARRY FEEDER



MINING FEEDER

